PJ-100W

PROJECTION SPEAKER



The PJ-100W Projection Speaker is designed for indoor use. The built-in terminal board provides an easy cable connection and allows bridge wiring. Its wide frequency range makes it suitable for use in both paging and BGM applications.

Key features


- Wide range speaker
- Ideally suited for Information broadcast

Specifications


Rated Input	10 W (50 V, 70 V, 100 V Line)
Impedance	100 V Line : 1 kΩ (10 W), 2 kΩ (5 W), 4 kΩ (2.5 W) 70 V Line : 500 Ω (10 W), 1 kΩ (5 W), 2 kΩ (2.5W), 4 kΩ (1.25 W) 50 V Line : 250 Ω (10 W), 500 Ω (5 W), 1 kΩ (2.5 W), 2 kΩ (1.25 W), 4 kΩ (0.63 W)
Sound Pressure Level	92 dB (1 m, 1 W) at 1 kHz
Frequency Response	65 Hz - 15 kHz
Speaker Component	12 cm
Finish	Cabinet, Cover: ABS Resin, off-white Bracket: SPCC, off-white
Dimensions	160 (W) x 200 (H) x 195 (D) mm (6.3 x 7.87" x 7.68")
Weight	1.8 kg (3.97 lb)

Note: Avoid installing the speaker in locations which vibrate considerably or under environments easy to be oil-contaminated.


Dimensions

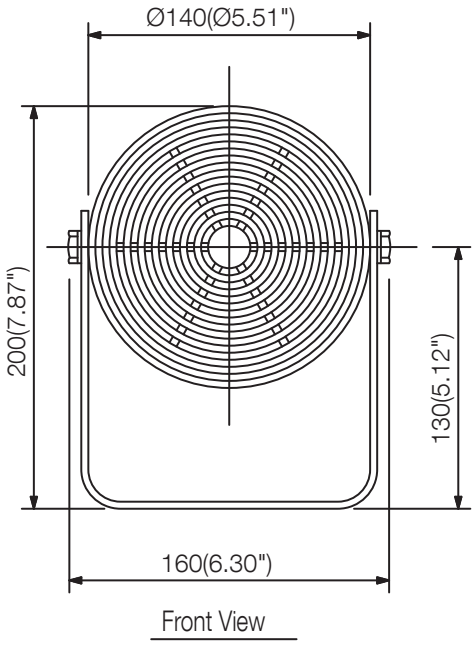


Front View

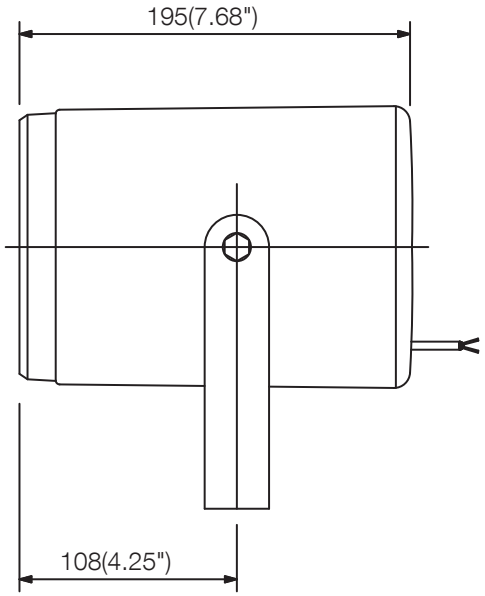

Side View

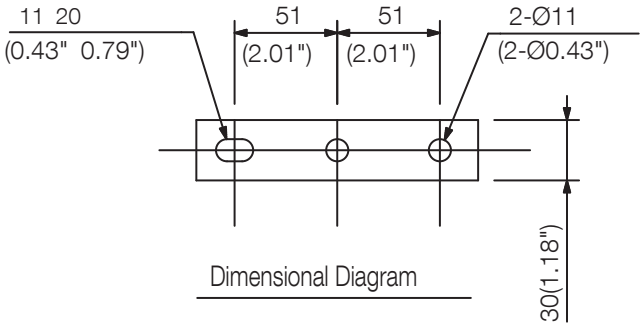

Dimensional Diagram

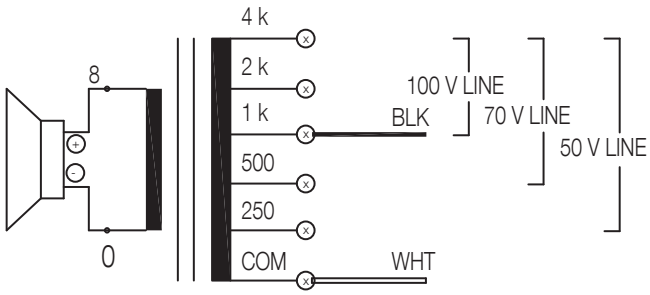

2-Wire-System

UNIT:mm SCALE:1/4

A&E specifications

Sound projector in 100V line, ABS plastic enclosure, swivel bracket to the exact orientation of the speaker